

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**


THIS PAGE BLANK (USPTO)



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification : Not classified	A2	(11) International Publication Number: WO 00/41525 (43) International Publication Date: 20 July 2000 (20.07.00)
(21) International Application Number: PCT/US00/00598 (22) International Filing Date: 11 January 2000 (11.01.00) (30) Priority Data: 09/228,097 11 January 1999 (11.01.99) US (71) Applicant: SCIMED LIFE SYSTEMS, INC. [US/US]; One SciMed Place, Maple Grove, MN 55311-1566 (US). (72) Inventors: VRBA, Anthony C.; 18519 83rd Avenue North, Maple Grove, MN 55311 (US). SOGARD, David J.; 5809 Concord Avenue, Edina, MN 55242 (US). (74) Agent: GRAD, Jonathan; Vidas, Arrett & Steinkraus, Suite 2000, 6109 Blue Circle Drive, Minnetonka, MN 55343-9131 (US).		(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: SELF-EXPANDING STENT DELIVERY SYSTEM WITH TWO SHEATHS

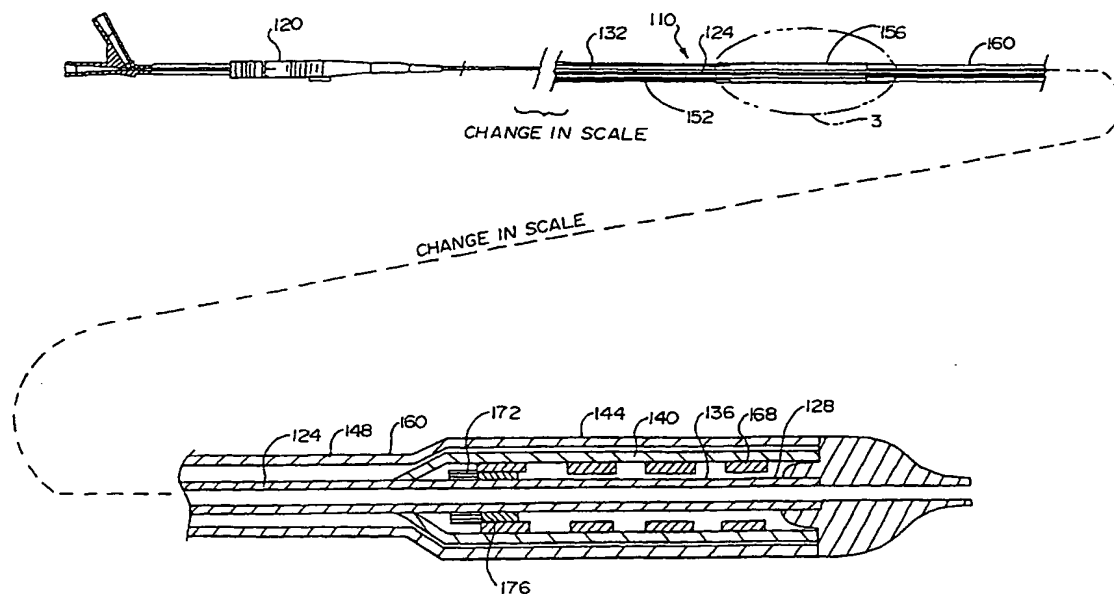

(57) Abstract

A medical device delivery system is disclosed which has a distal inner sheath and a distal outer sheath covering a medical device mounting region and any medical device mounted thereon. The outer sheath is designed to retain the medical device for lengthy periods of time while the inner sheath is designed to retain the sheath for shorter periods of time.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

SELF-EXPANDING STENT DELIVERY SYSTEM WITH TWO SHEATHS

U.S. Application No. 09/228,097 from which this application claims priority, is incorporated in its entirety herein by reference.

5

Field of the Invention

This invention relates to a stent delivery catheter system, such as the kind used in percutaneous transluminal coronary angioplasty (PTCA) procedures. More particularly, it relates to a stent delivery catheter employing two retractable sheaths
10 which may be retracted to release a self-expanding stent, a balloon assisted expandable stent or a balloon expandable stent.

Background of the Invention

In typical PTCA procedures, a guiding catheter is percutaneously
15 introduced into the cardiovascular system of a patient and advanced through the aorta until the distal end is in the ostium of the desired coronary artery. Using fluoroscopy, a guide wire is then advanced through the guiding catheter and across the site to be treated in the coronary artery. An over the wire (OTW) balloon catheter is advanced over the guide wire to the treatment site. The balloon is then expanded to reopen the artery. The
20 OTW catheter may have a guide wire lumen which is as long as the catheter or it may be a rapid exchange catheter wherein the guide wire lumen is substantially shorter than the catheter. Alternatively, a fixed wire balloon catheter could be used. This device features a guide wire which is affixed to the catheter and cannot be removed.

To help prevent arterial closure, repair dissection, or prevent restenosis, a
25 physician can implant an intravascular prosthesis, or a stent, for maintaining vascular patency inside the artery at the lesion. The stent may either be a self-expanding stent, a balloon assisted expandable stent or a balloon expandable stent. For the latter type, the stent is often delivered on a balloon and the balloon is used to expand the stent. The self-expanding stents may be made of shape memory materials such as nitinol or
30 constructed of regular metals but of a design which exhibits self expansion characteristics.

In certain known stent delivery catheters, a stent and an optional balloon are positioned at the distal end of the catheter, around a core lumen. The stent and

balloon are held down and covered by a sheath or sleeve. When the distal portion is in its desired location of the targeted vessel the sheath or sleeve is retracted to expose the stent. After the sheath is removed, the stent is free to self-expand or be expanded with a balloon.

5 In a coronary stent deployment system which utilizes a retractable sheath one problem which is encountered is the interaction of the sheath and the stent upon retraction of the sheath. Typically, as the sheath slides off of the stent, the stent is subjected to potential marring by the sheath. While this problem can be minimized by making the sheath of soft materials, such materials are often unsuitable for use with a
10 self-expanding stent where prolonged storage results in creep deformation of the inner sheath.

 It is desirable to provide a medical device delivery system which provides a protective, non-marring inner sheath for the medical device and is capable of retaining the medical device for brief periods of time and which further has an
15 additional outer sheath over the inner sheath which is capable of retaining the medical device for lengthy periods of time, thereby allowing the device to have a suitable shelf life.

Summary of the Invention

20 The present invention provides a medical device delivery system in which two sheaths, an inner sheath and an outer sheath, cover a medical device mounted on the distal end of the medical device delivery system. In its various embodiments, the invention contemplates a delivery system in which the inner sheath is either a tear away sheath or a retractable sheath and the outer sheath is either a retractable sheath or a pull
25 away sheath.

 In accordance with the present invention, the outer sheath is desirably constructed to be more creep resistant than the inner sheath. The outer sheath may be made of a material having a higher hoop strength than the inner material. The inner material should be capable of retaining the medical device in place on the delivery
30 system for at least a short period of time before it either is retracted or opens due to material failure. The outer sheath should be capable of retaining the medical device for longer periods of time so that the device may have a reasonable shelf life.

To this end, the invention provides a medical device delivery system.

comprising a manifold at the proximal end of the delivery system. Extending distally from the manifold is an inner tube. At the distal end of the inner tube is a medical device mounting region for concentrically mounting a medical device thereon.

Covering the medical device mounting region, at least in part, is a distal inner sheath attached to the inner tube at the distal region of the inner tube. The distal inner sheath is concentrically disposed about the inner tube. The medical device delivery system also comprises a distal outer sheath, concentrically disposed about the inner tube. At least a portion of the distal outer sheath is disposed about at least a portion of inner sheath.

In one embodiment of the invention, the distal inner sheath is a tear away sheath and the distal outer sheath is retractable by means of an outer sheath retraction device. The outer sheath retraction device extends in a distal direction from the manifold. The distal outer sheath extends from the distal end of the retraction device.

In another embodiment of the invention, the distal inner sheath is retractable by means of an inner sheath retraction device. The inner sheath retraction device extends in a distal direction from the manifold. The distal inner sheath extends from the distal end of the inner sheath retraction device. Similarly, the outer sheath is retractable by means of an outer sheath retraction device. The outer sheath retraction device extends in a distal direction from the manifold. The distal outer sheath extends from the distal end of the outer sheath retraction device.

In another embodiment of the invention, the distal inner sheath is retractable by means of an inner sheath retraction device. The inner sheath retraction device extends in a distal direction from the manifold. The distal inner sheath extends from the distal end of the inner sheath retraction device. The distal outer sheath contacts the inner sheath, and extends proximally from the distal region of the inner tube. The distal outer sheath is removed prior to insertion of the device in the body.

In all of the embodiments, the delivery system may further comprise the medical device mounted on the medical device mounting region. Among the contemplated medical device for use with this system are stents and grafts. Desirably, the stent will be self-expanding or a balloon assisted expandable stent.

Brief Description of the Figures

Figure 1 shows a longitudinal cross-sectional view of an embodiment of the inventive medical device delivery system.

Figure 2 shows a partial cut-away perspective view of the distal end of the embodiment of Fig. 1.

Figure 3 shows an enlarged view of region 3 of the medical device delivery system of Fig. 1.

5 Figure 4 shows a longitudinal cross-sectional view of an embodiment of the inventive medical device delivery system.

Figure 5 shows a longitudinal cross-sectional view of an embodiment of the inventive medical device delivery system.

10 Figure 6 shows a perspective view of a stent for use with the inventive medical device delivery system.

Figure 7 shows a perspective view of a graft for use with the inventive medical device delivery system.

Figure 8 shows a side elevational view of a vena cava filter for use with the inventive medical device delivery system.

15

Detailed Description of the Invention

While this invention may be embodied in many different forms, there are described in detail herein specific preferred embodiments of the invention. This description is an exemplification of the principles of the invention and is not intended to
20 limit the invention to the particular embodiments illustrated.

The present invention provides a medical device delivery system in which the medical device is contained and/or surrounded and/or protected by both an inner sheath and an outer sheath.

In several of the embodiments, the inner sheath is a tear away sheath.
25 The presence of a tear away inner sheath protects the medical device from being marred upon the sliding removal of the outer sheath. After the outer sheath is removed, the inner tear away sheath, no longer contained by the outer sheath, opens as a result of the expanding force of the self-expanding, balloon assisted or balloon expandable medical device.

30 Turning to the figures, Fig. 1 shows one embodiment of the inventive medical device delivery system generally at 110. The medical device delivery system 110 has a proximal end and a distal end and comprises a manifold 120 located at the proximal end of delivery system 110. Extending in a distal direction from manifold 120

is an inner tube 124 having a distal region 128 and a proximal region 132. At the distal region of inner tube 124 is a medical device mounting region 136 for concentrically mounting a medical device thereon. Delivery system 110 further comprises a distal inner sheath 140 attached to inner tube 124 at distal region 128. Distal inner sheath 140 is concentrically disposed about inner tube 124 and covers at least a portion, desirably a substantial portion and more desirably the entirety of medical device mounting region 136 to retain a medical device about the medical device mounting region. Inner sheath 140 is fixedly attached to the medical device delivery system and desirably is mounted to the inner tube. As shown in Fig. 2, distal inner sheath 140 is a perforated 137 or scored tear away sheath. A distal outer sheath 144 is concentrically disposed about inner tube 124 and at least a portion of distal outer sheath 144 is disposed about at least a portion of distal inner sheath 140. The device further comprises an outer sheath retraction device 148 which extends in a distal direction from manifold 120. Distal outer sheath 144 is seen to extend from the distal end of outer sheath retraction device 148.

Although there are a variety of outer sheath retraction devices that may be used in the practice of the invention, as shown in Figs. 1 and 3, a preferred outer sheath retraction device 148 comprises a proximal outer tube 152, a collapsible sheath 156 extending from the distal end of proximal outer tube 152 and a distal outer tube 160. The proximal end of distal outer tube 160 extends from the distal end of the collapsible sheath 156. A slidable pull wire 164 extends from manifold 120 to distal outer sheath 144. In use, the distal end of retraction device 148 moves in a proximal direction upon sliding pull wire 164 proximally thereby retracting distal outer sheath 144. Tear away inner sheath 140 may then open as a result of the force of the expansion of the expandable medical device. Because the tear away inner sheath is fixedly attached to the medical device delivery system, the tear away inner sheath is withdrawn from the body of the medical device delivery system is withdrawn.

The stent delivery system may, optionally, further comprise a medical device mounted on the medical device mounting region 136. While a variety of medical devices are contemplated, in the embodiment shown in Figs. 1 and 2, the medical device is a self-expanding stent 168.

In another embodiment of the inventions, as shown in Fig. 4, the delivery system, shown generally at 210, comprises a manifold 220, an inner tube 224 having a

distal region 228; a proximal region 232 and a medical device mounting region 236 for concentrically mounting a medical device thereon as in the previous embodiment.

Similarly, as in the previous embodiment, delivery system 210 further comprises a distal inner sheath 240. Distal inner sheath 240 is concentrically disposed about inner tube

5 224 and covers at least a portion of medical device mounting region 236. Unlike in the previous embodiment, delivery system 210 further comprises an inner sheath retraction device 241 having a distal end and a proximal end. Inner sheath retraction device 241, consists of pull collar 243 mounted on proximal end of distal end of inner sheath 240 and a pull wire 245 extending distally from manifold 220 to pull collar 243.

10 As in the previous embodiment, a distal outer sheath 244 is concentrically disposed about inner tube 224. At least a portion of distal outer sheath 244 is disposed about at least a portion of distal inner sheath 240. Also, the device comprises an outer sheath retraction device 248 comprising a proximal outer tube 252, a collapsible sheath 256 and a distal outer tube 260 as described for the embodiment of
15 Figs. 1-3. The collapsible sheath section of the medical device delivery system is similar to that shown in Fig. 3, differing only in the presence of an additional wire, corresponding to a slidable pull-wire operably associated with the inner sheath. Slidable wire 264 extends from manifold 220 to distal outer sheath 244 and in use, the outer sheath retraction device works in a manner identical to that described for the outer
20 sheath retraction device described above. Alternatively, although not shown in Fig. 4, inner sheath 240 may also be retracted via a collapsible retraction device similar to retraction device 248 used to retract outer sheath 244.

Also shown is an optional medical device in the form of a self-expanding stent 268 mounted on the medical device mounting region 236.

25 In another embodiment, the invention comprises a medical device delivery system shown generally at 310 in Fig. 5. Medical device delivery system 310, as in the previous embodiments, comprises a manifold 320, an inner tube 324 having a distal region 328, a proximal region 332 and a medical device mounting region 336 for concentrically mounting a medical device thereon. Delivery system 310 further
30 comprises a distal inner sheath 340. Distal inner sheath 340 is concentrically disposed about inner tube 324 and covers at least a portion of medical device mounting region 336. As in the embodiment of Fig. 4, delivery system 310 further comprises an inner sheath retraction device 341 having a distal end and a proximal end. Inner sheath

retraction device 341, consists of pull collar 343 mounted on proximal end of distal end of inner sheath 340 and a pull wire 345 extending distally from manifold 320 to pull collar 343.

As in the previous embodiments, a distal outer sheath 344 (in sock form) is concentrically disposed about inner tube 324. At least a portion of distal outer sheath 344 is disposed concentrically about at least a portion of distal inner sheath 340. Unlike in any of the previous embodiments, distal outer sheath 344 extends proximally from the distal end of the inner tube and is removable by sliding the distal outer sheath in a distal direction. Distal outer sheath 344 is in contact with distal inner sheath 340. Mounted concentrically about the inner tube and carrying the pull wire is outer tube 360. Although distal outer sheath 344 is depicted in Fig. 5 as being closed at the distal end, it may optionally be open at the distal end. In use, distal outer sheath 344 is removed prior to insertion of the medical device delivery system into the body. A removable sheath such as that disclosed in US 5,800,517 to Anderson et al., incorporated herein in its entirety by reference, may be used.

Also shown is an optional medical device in the form of a self-expanding stent 368 mounted on the medical device mounting region 336.

In another embodiment, not shown, the medical device delivery system is substantially similar to that shown in Fig. 5 differing only in that the retraction device for retracting the inner sheath is a collapsible sheath as shown in Figs. 1 and 3.

In the various embodiments of the invention, suitable manifolds, as are known in the art, may be employed. In the embodiment containing two retractable sheaths, the manifold must be able to accommodate two retraction mechanism. In the other embodiments in which one retraction device is employed, the manifold must be able to accommodate one retraction device.

The inner tubes employed in the various embodiments may be made of suitable materials as are known in the art including. Preferably, the inner tubes are made of flexible, but incompressible construction such as a polymer encapsulated braid or coil. Such construction is known in the art. The braid/coil may be comprised of stainless steel encased in a polymer such as Polyimide with an inner layer of Teflon.

The pull collars attached to the retractable sheaths may suitably be ring-shaped members made of stainless steel affixed to the interior of the retractable sheaths

by an appropriate adhesive such as Loctite 4011, a cyanoacrylate. Desirably, the pull collar will be made of a radio-opaque material such as gold.

The outer sheath, desirably will be made of a material which has sufficient strength to contain a self-expanding stent in the stent's unexpanded configuration. It is desirable that the outer sheath be constructed so as to be creep resistant. It is also highly desirable that the inner sheath be constructed to be less creep resistant than the outer sheath.

Some of the benefits of the present invention may also be realized in a system wherein the outer sheath is made of a thicker material than the inner sheath.

Suitable materials for the outer sheath include polyimide, Pebax, polyethylene, Nylon, and metal for the embodiments in which the outer sheath is retractable via a retraction device extending to the manifold. Suitable materials for the sock-like distal outer sheath include polyimide, Pebax, polyethylene, Nylon, and metal. As for the distal inner sheath, suitable materials include PTFE, Pebax, polyurethane, polyethylene, and polyimide for the tear away embodiments and for the retractable distal inner sheath embodiments.

The invention also contemplates the use of porous materials for the inner and outer sheaths thereby allowing for the inflow of bodily fluids into the medical device mounting region. This can be helpful in priming the medical device by forcing out any air in the region of the medical device. Suitable porous materials include expanded polytetrafluoroethylene (ePTFE), polyester and silicone. Desirably, the materials will have a pore size ranging from 0.01 mm to 5.0 mm.

Although the tear away sheath has been described as being mechanically released by the force of the expanding medical device, the invention also contemplates the use of a tear away sheath which is hydrolytically released. The sheath may be 'glued' shut via a bio-compatible water soluble material. The sheath may then be opened by supplying water thereto so as to dissolve the 'glue'. Optionally, the glue may be chosen such that it is stable in the presence of fluids at bodily temperatures but dissolves upon exposure to a fluid of slightly elevated temperature such as water at a temperature of 42°C. Alternatively, the sheath may be glued shut via a material which is releasable via actinic energy such as ultraviolet radiation or gamma radiation supplied thereto.

The distal inner and outer sheaths may be bonded to the inner tube and/or retraction devices by the use of suitable adhesives including Loctite 4011, a cyanoacrylate as well as methacrylate; or H.B. Fuller 3507, a urethane adhesive. Other suitable bonding methods include pressure welding, heat welding and laser welding.

5 The invention also contemplates the use of various lubricants on at least a portion of one or more of the inner and outer sheaths to facilitate the relative motion of the inner and outer sheaths upon retraction or removal of the outer sheath. As seen in Fig. 2, distal inner sheath 140 has an inner surface facing the inner tube and an outer surface 138 facing distal outer sheath 144. Similarly, distal outer sheath 144 has an inner surface 146 facing distal inner sheath 140 and an outer surface facing outward. A lubricant may be applied to at least a portion of at least one of outer surface 138 of inner sheath 140 or inner surface 146 of outer sheath 144 so as to reduce frictional forces between the two sheaths. The lubricant may be applied selectively to the surfaces or, alternatively, may be applied to the entirety of the surfaces.

15 Although the inner surface and outer surface to which lubricants may be applied have been highlighted in Fig. 2, it is understood that the invention provides for the similar use of such lubricants on the outer surface of the inner sheath and the inner surface of the outer sheath in the other embodiments as well.

In all of the above embodiments, a lubricant may, optionally, be applied to at least a portion of the inner wall and/or outer wall. Suitable lubricants include 20 silicones, PVP (polyvinyl pyrrolidone), PPO (polypropylene oxide) and PEO. Additionally, BioSlide™ coating produced by SciMed may be used as well. BioSlide™ is a hydrophilic, lubricious coating comprising polyethylene oxide and neopentyl glycol diacrylate polymerized in a solution of water and isopropyl alcohol in 25 the presence of a photoinitiator such as azobisisobutyronitrile.

Additional details of the design of embodiments of the inventive medical device delivery system which employ collapsible sheaths, in particular the portion of the device proximal to the inner sheath may be found in the various embodiments disclosed in US 5,534,007 to St. Germain and Olson, incorporated herein in its entirety by 30 reference.

In addition to the use of a collapsible sheath retraction device for retracting the outer sheath, the invention also contemplates the use of other suitable retraction means as are known in the art including slidably sealed retractable sheaths and

midshaft seals as described in co-pending commonly assigned US Patent Application No. 08/722,834 filed September 27, 1996, and a continuation-in-part application 09/071,484 filed May 1, 1998. The entire contents of both applications are hereby incorporated in their entirety by reference. Other contemplated retraction means include
5 sheaths activated directly by pull-collars as described in US Patent Application No. 09/071,484 filed May 27, 1998, and screw-like retraction devices as described in US Patent 5,201,757 to Heyn et al. all of which are incorporated herein in their entirety by reference.

Although the medical device shown in the figures have all been
10 described as self-expanding stents, other mechanically expandable stents may be used as well, including balloon expandable stents. A perspective view of one suitable stent is shown in Fig. 6 at 668. Other medical devices suitable for delivery with the present delivery system include implants such as grafts and vena cava filters. A suitable graft is shown in Fig. 7 at 768 while a suitable vena cava filter is shown in Fig. 8 at 868.

15 As shown in the figures, the medical device delivery systems may further comprise other optional features, as are known in the art, such as bumpers 172, 272, 372 and 472 and markers 176, 276, 376 and 476. Bumpers 172-472 may be made of polyethylene and are affixed to inner tube 124 by adhesive such as H.B. Fuller 3507. Marker bands 176-476 are preferably made of a radio-opaque material such as gold
20 although other materials such as stainless steel may be used as well. The markers are included to aid in positioning and may be affixed to inner tube 124 by adhesive such as Loctite 4011.

While several specific embodiments of the present invention have been described, the invention is directed more generally toward the inclusion of two sheaths
25 in any other suitable catheter design not specifically described herein including fixed wire, over-the-wire and rapid-exchange catheters.

In the case of the fixed-wire design, the guidewire is fixedly attached to the medical device delivery system. A fixed-wire delivery system is described in U.S. 5,702,364 to Euteneuer et al., incorporated herein in its entirety by reference, and may
30 be suitably modified for use with the inventive medical device delivery system.

In an over-the-wire embodiment, the inner tube extends proximally to a manifold and a guide wire may be inserted into the inner tube from the proximal end,

the guide wire extending to the distal end of the system. The medical device delivery system may then ride on the guidewire.

Similarly, a rapid exchange delivery system is described in U.S. 5,534,007 to St. Germain et al., incorporated herein in its entirety by reference, and may be suitably modified for use with the inventive medical device delivery system. Specifically, the rapid-exchange version may be realized by terminating the inner tube in a guide wire port in a location along the system distal to the proximal end of the system to allow for insertion of a guide wire therein. In the rapid-exchange embodiment, only a portion of the medical device delivery system rides on a guidewire. Typically, the usable length of the medical device delivery system is approximately 135 cm. For a rapid-exchange medical device delivery system, the distance from where the guide wire accesses the inner tube to the distal tip will be approximately 5 cm to 35 cm.

The above Examples and disclosure are intended to be illustrative and not exhaustive. These examples and description will suggest many variations and alternatives to one of ordinary skill in this art. All these alternatives and variations are intended to be included within the scope of the attached claims. Those familiar with the art may recognize other equivalents to the specific embodiments described herein which equivalents are also intended to be encompassed by the claims attached hereto.

-12-

What is claimed is:

1. A medical device delivery system having a proximal end and a distal end comprising:
 - an inner tube having a distal region and a proximal region and a medical device mounting region at the distal region for mounting a medical device thereabout;
 - a distal inner sheath disposed about at least a portion of the medical device mounting region,
 - an inner sheath retraction device extending from the distal inner sheath to the proximal end of the medical device delivery system;
 - 10 a distal outer sheath disposed about at least a portion of the medical device mounting region; and
 - an outer sheath retraction device extending from the distal outer sheath to the proximal end of the medical device delivery system.
2. The medical device delivery system of claim 1 wherein the outer sheath is constructed to be creep resistant.
3. The medical device delivery system of claim 1 wherein the inner sheath is constructed to be less creep resistant than the outer sheath.
4. The medical device delivery system of claim 1 wherein the outer sheath is made of a thicker material than the inner sheath.
- 20 5. The medical device delivery system of claim 1 wherein the inner sheath is a perforated tear away sheath.
6. The medical device delivery system of claim 1 wherein the retraction device comprises a pull-collar with a pull wire attached thereto.
7. The medical device delivery system of claim 1 wherein the retraction device comprises:
 - a proximal outer tube having a distal end;
 - a collapsible sheath having a proximal and a distal end, the proximal end of the collapsible sheath extending from the distal end of proximal outer tube;
 - a distal outer tube having proximal and distal ends, the proximal end of the distal outer tube extending from the distal end of the collapsible sheath; and
 - 30 a slidable pull wire extending proximally from the distal outer sheath,

-13-

whereby the distal end of the retraction device moves in a proximal direction on sliding the pull wire proximally.

8. The medical device delivery system of claim 1 wherein the inner sheath has an inner surface facing the inner tube and an outer surface facing the outer sheath and the outer sheath has an inner surface facing the inner sheath and an outer surface facing outward and a lubricant is applied to at least a portion of at least one of the outer surface of the inner sheath or the inner surface of the outer sheath so as to reduce frictional forces between the two sheaths.
9. The medical device delivery system of claim 1 wherein at least one of the inner sheath and the outer sheath is made of a porous material.
10. The medical device delivery system of claim 1 further comprising a medical device selected from the group consisting of stents, grafts and vena cava filters, the medical device mounted on the medical device mounting region.
11. The medical device delivery system of claim 10 wherein the medical device is a stent.
12. The medical device delivery system of claim 11 wherein the stent is self-expandable.
13. The medical device delivery system of claim 1 wherein the distal outer sheath is removable by sliding it in a distal direction.
14. The medical device delivery system of claim 13 wherein the outer sheath is constructed to be creep resistant.
15. The medical device delivery system of claim 13 wherein the inner sheath is constructed to be less creep resistant than the outer sheath.
16. The medical device delivery system of claim 13 wherein the outer sheath is made of a thicker material than the inner sheath.
17. The medical device delivery system of claim 13 wherein the retraction device comprises a pull-collar with a pull wire attached thereto.
18. The medical device delivery system of claim 13 wherein the inner sheath has an inner surface facing the inner tube and an outer surface facing the outer sheath and the outer sheath has an inner surface facing the inner sheath and an outer surface facing outward and a lubricant is applied to at least a portion of at least one of the outer surface

-14-

of the inner sheath or the inner surface of the outer sheath so as to reduce frictional forces between the two sheaths.

19. The medical device delivery system of claim 13 wherein at least one of the inner sheath and the outer sheath is made of a porous material.

5 20. The medical device delivery system of claim 13 further comprising a medical device selected from the group consisting of stents, grafts and vena cava filters, the medical device mounted on the medical device mounting region.

21. The medical device delivery system of claim 13 wherein the medical device is a stent.

10 22. The medical device delivery system of claim 13 wherein the stent is self-expandable.

23. In a stent delivery system comprising a first sheath carried over a stent, the improvement being a second sheath carried over the first sheath, the first sheath constructed to be less creep resistant than the second sheath.

15 24. The stent delivery system of claim 23, the first sheath being retractable sheath, the second sheath being retractable sheath, the system further comprising a first retraction device extending from the first retractable sheath to the proximal end of the stent delivery system and a second retraction device extending from the second retractable sheath to the proximal end of the stent delivery system.

Fig. 1

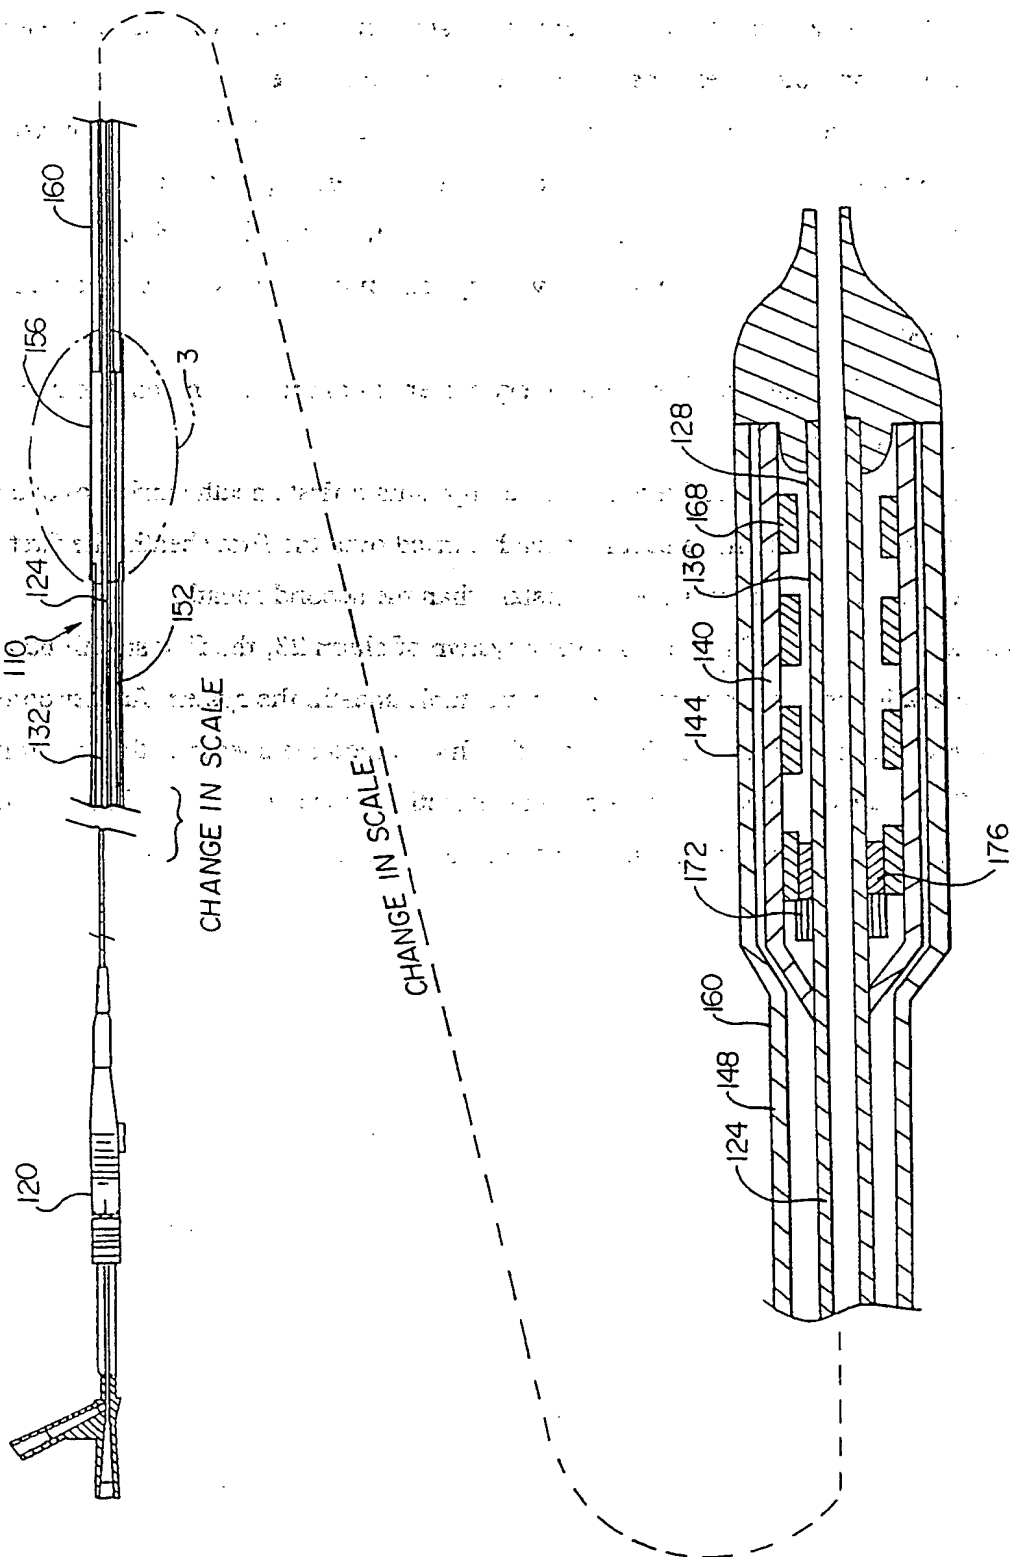


Fig. 2

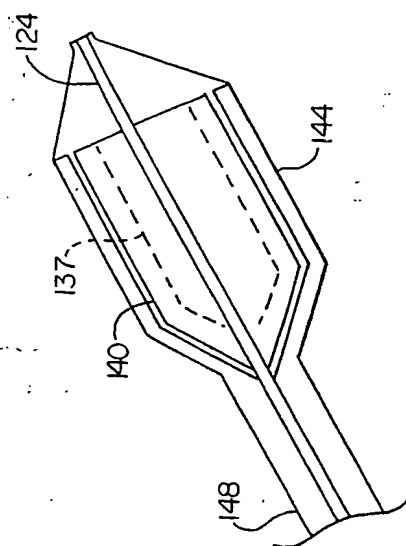


Fig. 3

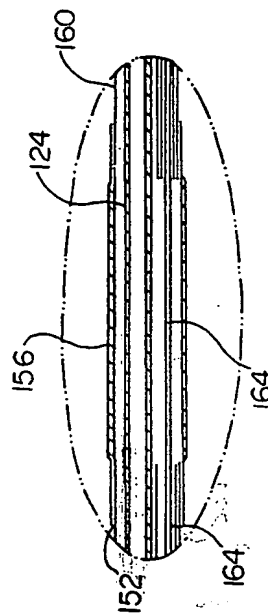


Fig. 4

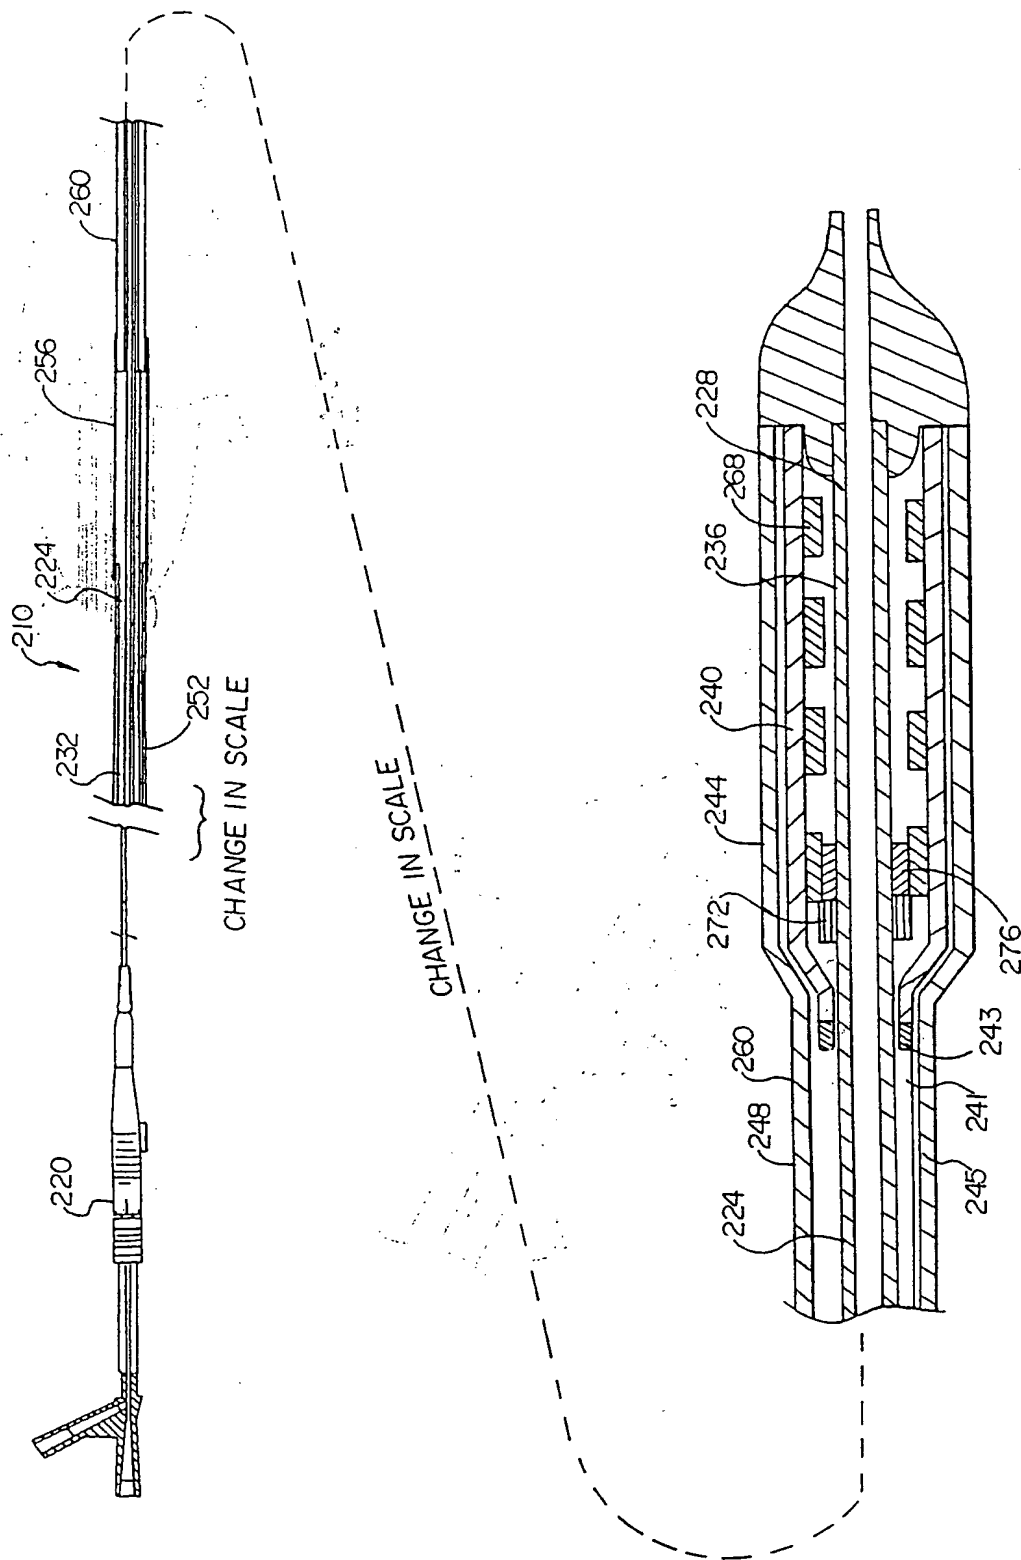
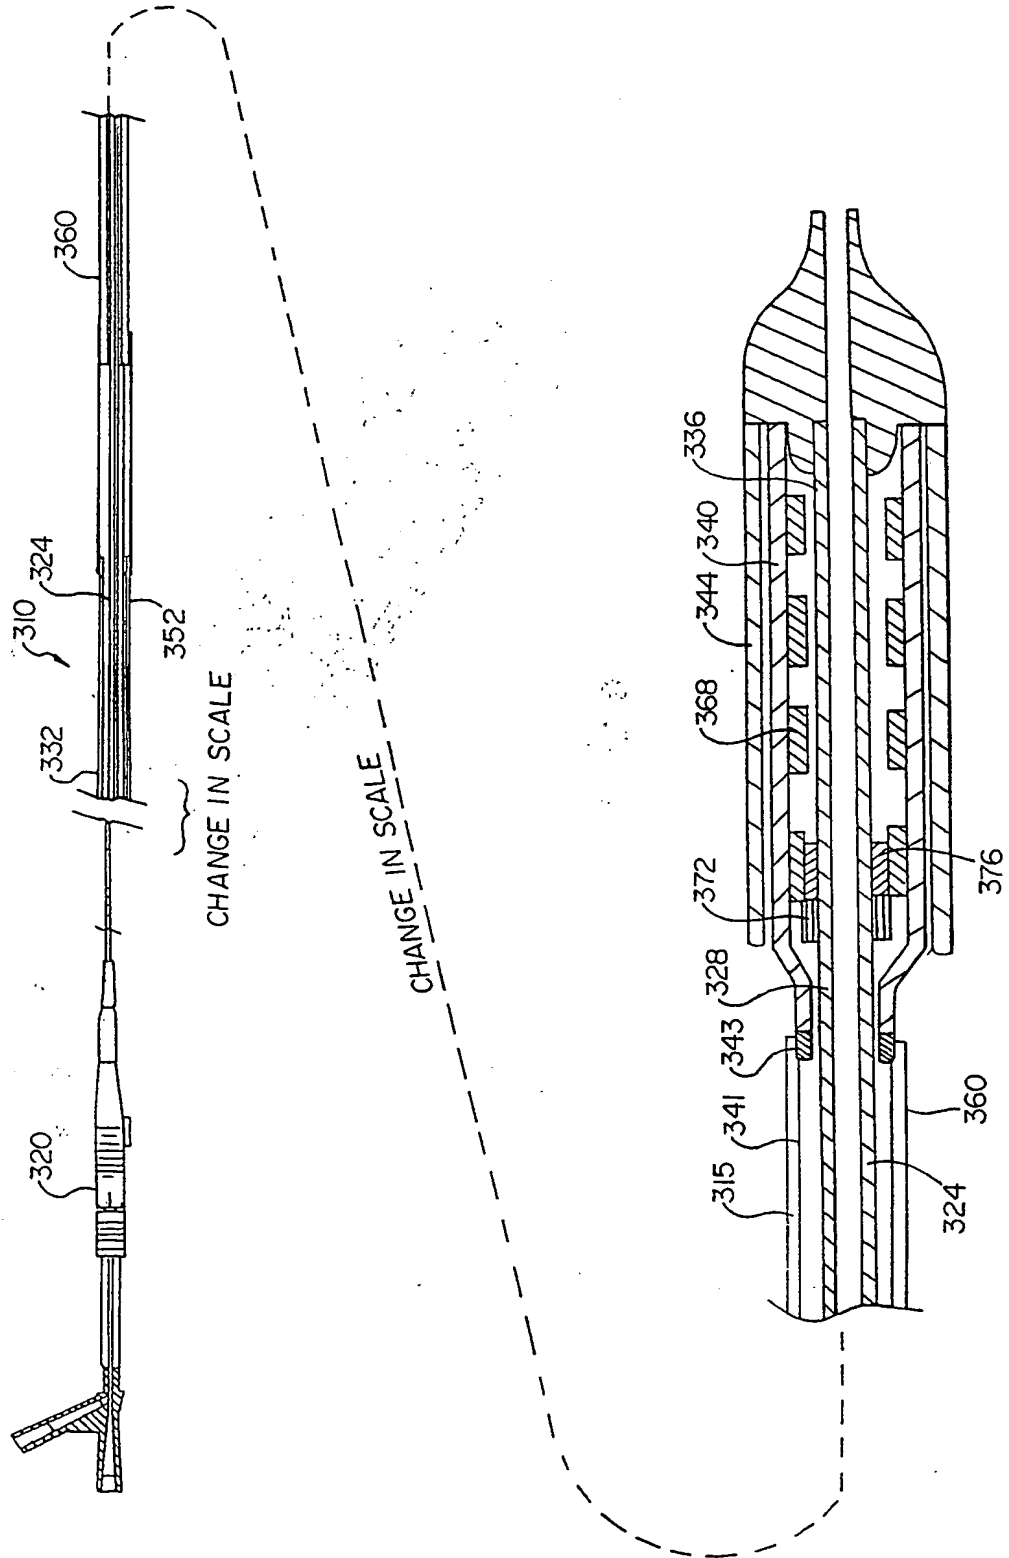


Fig. 5





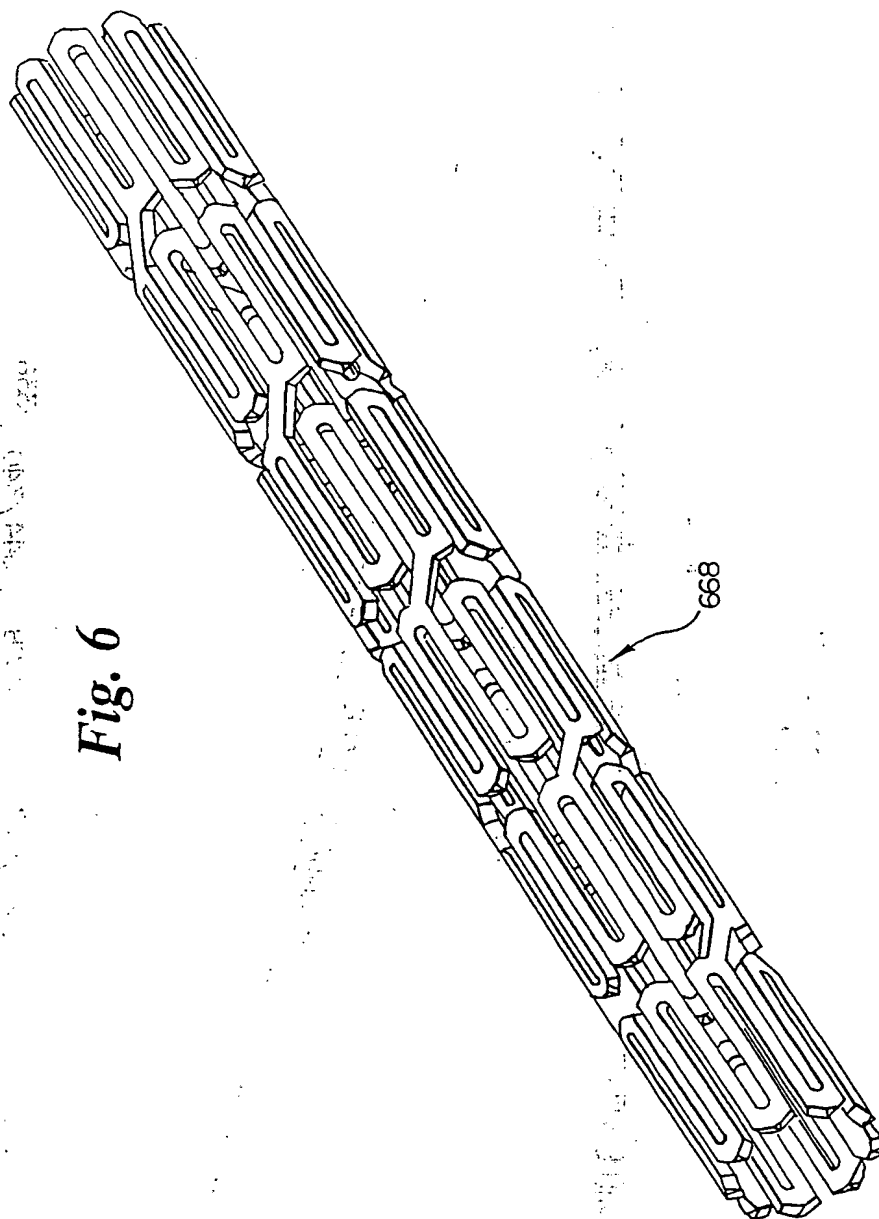


Fig. 6

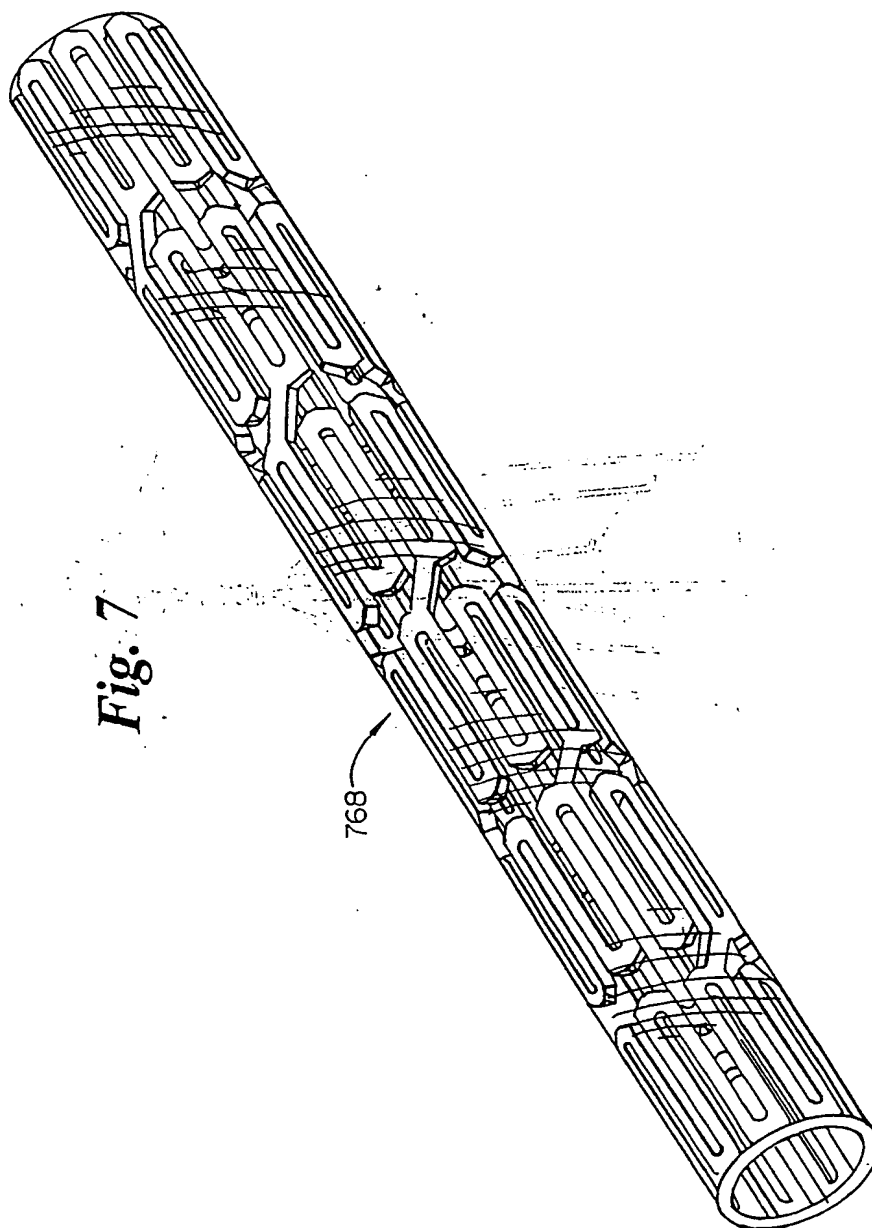

7/7


Fig. 8

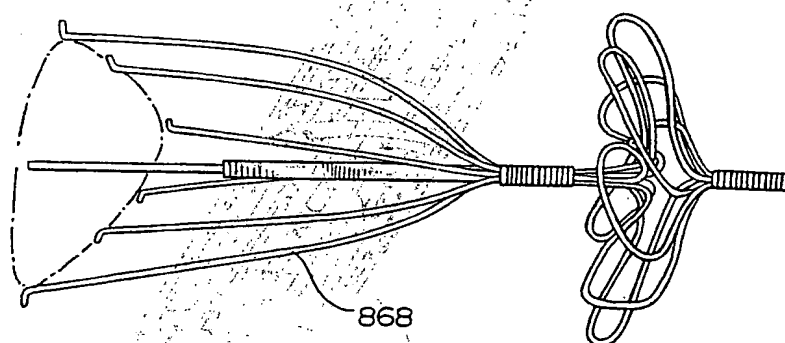

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁷: A61F 2/06	A3	(11) International Publication Number: WO 00/41525 (43) International Publication Date: 20 July 2000 (20.07.00)
(21) International Application Number: PCT/US00/00598 (22) International Filing Date: 11 January 2000 (11.01.00) (30) Priority Data: 09/228,097 11 January 1999 (11.01.99) US (71) Applicant: SCIMED LIFE SYSTEMS, INC. [US/US]; One SciMed Place, Maple Grove, MN 55311-1566 (US). (72) Inventors: VRBA, Anthony C.; 18519 83rd Avenue North, Maple Grove, MN 55311 (US). SOGARD, David J.; 5809 Concord Avenue, Edina, MN 55242 (US). (74) Agent: GRAD, Jonathan; Vidas, Arrett & Steinkraus, Suite 2000, 6109 Blue Circle Drive, Minnetonka, MN 55343-9131 (US).		(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> (88) Date of publication of the international search report: 28 September 2000 (28.09.00)

(54) Title: SELF-EXPANDING STENT DELIVERY SYSTEM WITH TWO SHEATHS

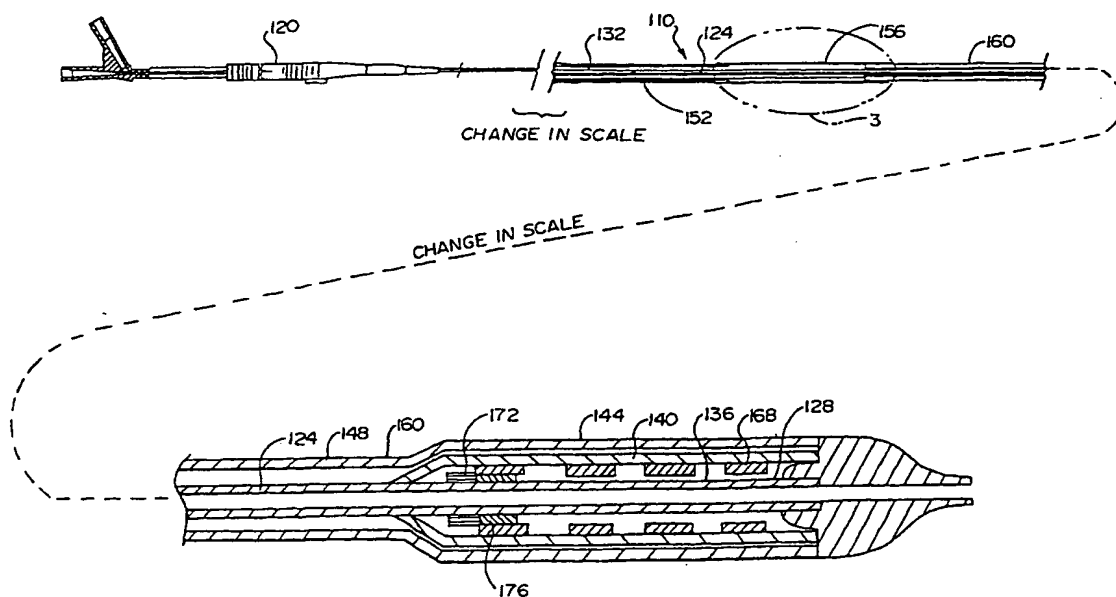**(57) Abstract**

A medical device delivery system (110) is disclosed which has a distal inner sheath (140) and a distal outer sheath (144) covering a medical device mounting region (136) and any medical device (168) mounted thereon. The outer sheath (144) is designed to retain the medical device (168) for lengthy periods of time while the inner sheath (140) is designed to retain the sheath for shorter periods of time.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viêt Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/00598

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F2/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 696 447 A (CARDIOVASCULAR CONCEPTS INC) 14 February 1996 (1996-02-14) page 15, line 29 -page 16, line 13 page 18, line 46 -page 19, line 2 claims; figures 13-15, 24A-24C	1-4, 8, 10-16, 18, 20-24
X	WO 98 39056 A (SCIMED LIFE SYSTEMS INC) 11 September 1998 (1998-09-11)	1-3, 5, 8, 10-12, 14, 15, 18, 20-24
Y	page 16, line 5 -page 19, line 29 page 24, line 26 -page 25, line 7 page 26, line 3 -page 27, line 25 claims; figures	6, 17

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

5 July 2000

Date of mailing of the international search report

12/07/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kuehne, H-C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 00/00598

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 12988 A (SCIMED LIFE SYSTEMS INC) 2 April 1998 (1998-04-02) cited in the application	1-5, 7-16, 18-24
Y	the whole document	6,17
A	WO 96 32078 A (SCHNEIDER USA INC) 17 October 1996 (1996-10-17) claims; figures	1-24
A	EP 0 368 523 A (BARD INC G R) 16 May 1990 (1990-05-16) claims; figures	1-24
A	US 5 800 517 A (ANDERSON CURTIS E ET AL) 1 September 1998 (1998-09-01) cited in the application the whole document	1-24
A	US 5 534 007 A (OLSON SCOTT A ET AL) 9 July 1996 (1996-07-09) cited in the application the whole document	1-24

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 00/00598

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0696447 A	14-02-1996	US 5683451 A	04-11-1997
		DE 69514589 D	24-02-2000
		EP 0948946 A	13-10-1999
		EP 0943302 A	22-09-1999
		JP 8173548 A	09-07-1996
		US 5824041 A	20-10-1998
		US 6024763 A	15-02-2000
WO 9839056 A	11-09-1998	US 5893868 A	13-04-1999
		EP 0973576 A	26-01-2000
WO 9812988 A	02-04-1998	US 5772669 A	30-06-1998
		AU 4236697 A	17-04-1998
		EP 1006939 A	14-06-2000
		US 5957930 A	28-09-1999
WO 9632078 A	17-10-1996	AU 4632196 A	30-10-1996
		CA 2218072 A	17-10-1996
		EP 0820259 A	28-01-1998
		JP 10507675 T	28-07-1998
		US 5662703 A	02-09-1997
EP 0368523 A	16-05-1990	AU 635223 B	18-03-1993
		AU 4289389 A	17-05-1990
		CA 2002767 A	10-05-1990
		CN 1042477 A	30-05-1990
		DE 68925780 D	04-04-1996
		DE 68925780 T	19-09-1996
		ES 2085280 T	01-06-1996
		IE 74699 B	30-07-1997
		JP 2180276 A	13-07-1990
		US 5135487 A	04-08-1992
		US 5279560 A	18-01-1994
US 5800517 A	01-09-1998	EP 0918497 A	02-06-1999
		WO 9807387 A	26-02-1998
US 5534007 A	09-07-1996	CA 2219658 A	21-11-1996
		EP 0825839 A	04-03-1998
		JP 11505162 T	18-05-1999
		WO 9636298 A	21-11-1996

THIS PAGE BLANK (USPTO)